

## Configuration details

weinor GmbH & Co. KG PO box 301473 D-50784 Köln

### C P Interiors

**Rue Des Pres Trading Estate  
GB-JE2 7QN St Saviour Jersey**

reference: SO9755  
Your order no.: Noble  
weinor customernumber: 165708  
creation Date: 20.04.2020  
weinor pers. in charge: Chris Nicholson  
phone / fax number: +49-221-59709-452  
representat.: Chris Spickett  
tel (representat.): 0044 ( 0) 7894443907

Dear customer,

please find your order confirmation including your required dimensions.  
If ok please release your order in E-Shop on your own and can see immediately your delivery date.  
Thank you very much.

You can now also stop your order faster directly online.

| pos | quantity | article                          |
|-----|----------|----------------------------------|
| 1   | 1        | weinor Terrazza Originale / Plus |

|  |  |
|--|--|
| Permissible snow-bearing load  | : 750 N/m <sup>2</sup>   |
| Roofsystem   | : Terrazza S Originale   |
| External dimensions  | : 5500mm x 2000mm Depth: wall up to INSIDE edge of post  |
| Bottom edge gutter (mm)  | : 2400 mm  |
| Bottom edge connection to wall (mm)  | : 3050 mm  |
| Top edge connection to wall (mm)   | : 3205 mm  |
| Pitch of roof [°]  | : 14,37 °  |
| info   | : 0  |
| Basic colour   | : WT029/90147 Approx. RAL 9007 Metallic  |
| Covering   | : prepared for 10mm LSG  |
| Information about roofing  | : Caution! The dimensions for web plates and/or glass cannot be changed and only apply to the covering you have selected!! |
| basic element  | : 101 Type A pent roof   |
| Seals  | : silicone-containing seals  |
| Connection to wall left?   | : No wall connection on left   |
| Connection to wall right?  | : Continuous wall connection on right  |
| Static adjustment of the roof for glazing element under side roof -beams on left and / or right? | : Yes, statics for GEs (w50-c lite side element)   |

weinor GmbH & Co. KG  
Mathias-Brüggen-Strasse 110  
D-50829 Köln  
weinor.com

Managing Director:  
Thilo Weiermann  
General partner:  
Weinor Beteiligungs-GmbH  
Köln

VAT no.: DE 122814372  
Tax ID no.: 217/5866/0097  
Place of registration: Cologne  
Company reg. no.: HRA 5676  
Place of registration: Cologne  
Company reg. no.: HRB 4661

Commerzbank London  
Sort Code 40-62-01  
Swift BIC Code COBAGB2X  
Account no: 30266480  
IBAN: GB24 COBA 4062 0130 2664 80

## Configuration details

weinor GmbH & Co. KG PO box 301473 D-50784 Köln

customer: 165708 reference: SO9755

Page 2 of 11

| pos  | quantity | article                                      |
|--|----------|--|
| Roof support type, inner roof supports                         | :        | 110 roof girder without steel                |
| Roof support type, outer roof supports left                    | :        | 110 roof girder without steel                |
| Roof support type, outer roof supports right                   | :        | 110 roof girder without steel                |
| Further transoms across all roof sections                      | :        | no   |
| Axial dimension rafter version post                            | :        | 901,2 mm square post                         |
| Post type left   | :        | Post outside                                 |
| Post type right  | :        | Post center / wall                           |
| Number of posts  | :        | 2 Piece                                      |
| Post position on the left                                      | :        | 60,5 mm                                      |
| Post position on the right                                     | :        | 67,5 mm                                      |
| Maximum spacing for posts when gutter has 1 x steel            | :        | 5800 mm for 1 x steel in gutter              |
| Length of post   | :        | 2600 mm                                      |
| Steel reinforcement for roof gutter                            | :        | 1 * Galvanised flat steel                    |
| Post attachment left   | :        | 196x196 post plate                           |
| Post attachment right  | :        | 116x196 post plate                           |
| Number of post base plates 116x196                             | :        | 1 Piece                                      |
| Number of post base plates 196x196                             | :        | 1 Piece                                      |
| Number of caps for post plate                                  | :        | 1 Piece                                      |
| Number of caps for post plate                                  | :        | 1 Piece                                      |
| Drain on left side?  | :        | Drain through the left post                  |
| Drain on right side?   | :        | Drain through the right post                 |
| Number of drains through posts incl. down pipes with bends 87° | :        | 2 incl. downspout and 87° elbow              |
| Leaf protection screen (no extra cost)                         | :        | Leaf guard same width as roof                |
| Provision for fitting Sottezza.                                | :        | 4 Piece                                      |
| Sottezza-Type  | :        | Sottezza stretch/optistretch (alle variants) |
| Substructure elements available (from outside)                 | :        | UBB glazing elements on both sides           |
| Projection Sottezza [mm]                                       | :        | 1988,9 mm                                    |

The specified length does account for 40 mm spacing from the wall or 20 mm from the guttering.

## Configuration details

weinor GmbH & Co. KG PO box 301473 D-50784 Köln

customer: 165708 reference: SO9755

Page 3 of 11

| pos | quantity | article |
|-----|----------|---------|
|-----|----------|---------|

Distance from Sottezza to the wall : 40 mm

Distance from Sottezza to the gutter : 20 mm

Projection of WGM : 2179 mm

The specified length does account for 20 mm and an overhang on the end of rafter 30 mm from the guttering.

Left-hand wall : Rectangular pipe 50x30

Flat aluminium 60 x 2 mm : 4 Piece

Length of flat aluminium 60 x 2 mm : 3000 mm

Weight [kg] : 187,5 kg

|          |          |                                       |
|----------|----------|---------------------------------------|
| <b>2</b> | <b>1</b> | <b>weinor Side element LITE w50-c</b> |
|----------|----------|---------------------------------------|

Product use : private house

Frame profile : blind frame section 105 w50-c bottom  
blind frame section 35 w50-c top

Width of element [mm] : 1960 mm

Incline : 14,37 Degree(s)

Installation side (as seen from inside) : right

Number of vertical glass panels : two parts

Prepared for : prepared for 6mm (for cold use)

Basic colour : WT029/90147 Approx. RAL 9007 Metallic

gap seal : Gap seals for 6 mm glass, length 2000 mm

Cardboard container : edges reinforcement

## Configuration details

weinor GmbH & Co. KG PO box 301473 D-50784 Köln

customer: 165708 reference: SO9755

Page 4 of 11

| pos | quantity | article |
|-----|----------|---------|
|-----|----------|---------|

|          |          |  |
|----------|----------|--|
| <b>3</b> | <b>1</b> | <b>weinor w17 easy - the full glass sliding door</b> |
|----------|----------|--|

|   |   |
|---|---|
| Product use   | : private house   |
| Width of element [mm]   | : 1960 X 2400   |
| type of floor rail  | : standard floor rail with CleanCase                            |
| CleanCase left (from inside)                                  | : yes   |
| CleanCase right (from inside)                                 | : yes   |
| Selection of leaves + tracks                                  | : 2-track with 2 leaves   |
| Position of active leaf?                                      | : left, as seen from inside                                     |
| Direction of opening  | : sliding to the right  |
| Glazing   | : 10 mm toughened safety glass, clear                           |
| Soft-Closing-System   | : Soft-Closing-System standard                                  |
| handling  | : handle bar standard   |
| side of the handling  | : handling inside   |
| leaf actuator   | : leaf actuator only closing in sliding direction               |
| Locking mechanism on inside, on bottom glass retainer profile | : Standard: Glass retainer profile, pre-drilled                 |
| Height of knob From bottom edge of guide track (mm)           | : 1050 mm   |
| Basic colour  | : WT029/90147 Approx. RAL 9007 Metallic                         |
| wall connection profile left                                  | : yes   |
| wall connection profile right                                 | : yes   |
| brush seal  | : 1 x Brush profile transparent for 10 mm glass, length 2800 mm |
| Cardboard container   | : edges reinforcement   |
| packaging   | : Export packaging/ glass pallet                                |
| extra charge glass pallet                                     | : 1 x wooden pallet   |
| weight  | : 127,4 kg  |

## Configuration details

weinor GmbH & Co. KG PO box 301473 D-50784 Köln

customer: 165708 reference: SO9755

Page 5 of 11

| pos | quantity | article |
|-----|----------|---------|
|-----|----------|---------|

|          |          |  |
|----------|----------|--|
| <b>4</b> | <b>1</b> | <b>weinor w17 easy - the full glass sliding door</b> |
|----------|----------|--|

|   |   |
|---|---|
| Product use   | : private house   |
| Width of element [mm]   | : 5257 X 2400   |
| type of floor rail  | : standard floor rail with CleanCase                            |
| CleanCase left (from inside)                                  | : yes   |
| CleanCase right (from inside)                                 | : yes   |
| Selection of leaves + tracks                                  | : 5-track with 5 leaves   |
| Position of active leaf?                                      | : right, as seen from inside                                    |
| Direction of opening  | : sliding to the left   |
| Glazing   | : 10 mm toughened safety glass, clear                           |
| Soft-Closing-System   | : Soft-Closing-System standard                                  |
| handling  | : handle bar standard   |
| side of the handling  | : handling inside   |
| leaf actuator   | : leaf actuator only closing in sliding direction               |
| Locking mechanism on inside, on bottom glass retainer profile | : Standard: Glass retainer profile, pre-drilled                 |
| Height of knob From bottom edge of guide track (mm)           | : 1050 mm   |
| Basic colour  | : WT029/90147 Approx. RAL 9007 Metallic                         |
| wall connection profile left                                  | : yes   |
| wall connection profile right                                 | : yes   |
| brush seal  | : 4 x Brush profile transparent for 10 mm glass, length 2800 mm |
| Cardboard container   | : edges reinforcement   |
| packaging   | : Export packaging/ glass pallet                                |
| weight  | : 341,7 kg  |

## Configuration details

weinor GmbH & Co. KG PO box 301473 D-50784 Köln

customer: 165708 reference: SO9755

Page 6 of 11

| pos | quantity | article |
|-----|----------|---------|
|-----|----------|---------|

|   |   |                                |
|---|---|--------------------------------|
| 6 | 1 | weinor Sottezza II OptiStretch |
|---|---|--------------------------------|

Product use : private house  
 Sales order Terrazza : 502515044  
 Posn. of the sales order for Terrazza : 1  
 Number of panels : single unit  
 width Terrazza [mm] : 5500 mm  
 Distance centre to centre field : 5345 mm  
 Width of cassette total [mm] : 5381 mm  
 Projection [mm] : 1988,9 mm  
 Basic colour : WT029/90147 Approx. RAL 9007 Metallic  
 Cable clips along the back of the cassette : without cable clips along the back of the cassette  
 type of control : motor (Becker)  
 Side of control (seen from the front) : left

with remote control BiConnect : **Yes! Please remind the separate order!**  
 Information on BiConnect : The BiConnect has been done in 502515044 position 7!  
 Hirschmann plug tight? : Hirschmann plug not assembled  
 Type of engine : 121066-0000  
 Side channel bracket : 2 Piece  
 brackets top plate : 2 Piece  
 colour of parts :  
 Colour, cassette :  
 colour front rail :  
 Colour, side channel :  
 colour of guide rail end caps :  
 colour of guide bar brackets :  
 real-design : WE3-501 my collections  
 colour of thread Saba : light beige  
 Cardboard container : edges reinforcement  
 weight : 78 kg

## Configuration details

weinor GmbH & Co. KG PO box 301473 D-50784 Köln

customer: 165708 reference: SO9755

Page 7 of 11

| pos | quantity | article |
|-----|----------|---------|
|-----|----------|---------|

|   |   |                  |
|---|---|------------------|
| 7 | 1 | weinor BiConnect |
|---|---|------------------|

|                             |   |
|-----------------------------|---|
| deliver BiConnect separate? | : No; supply receiver and handheld remote control with awning   |
| shipment info               | : The pre set receivers (except LED) and the handset will be packed with contract number 502515044 pos 6! |
| receiver for motor control  | : 1 BiRec MA, basic<br>: BiConnect BiEasy 1M (black version)  |
| learned on channel 1        | : BiRec MA-K, basic for order 502515044/6: Sottezza II OptiStretch engine left                            |

## Configuration details


weinor GmbH & Co. KG PO box 301473 D-50784 Köln

customer: 165708


reference: SO9755

Page 8 of 11

isometric view

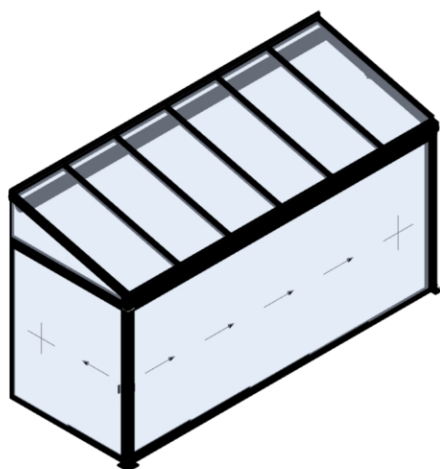

top view

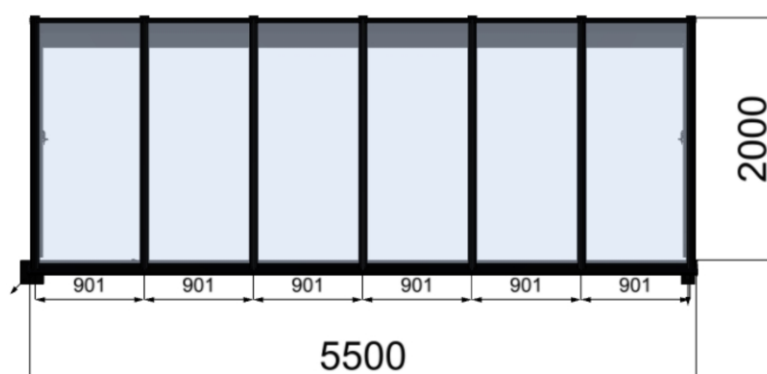



## Configuration details


weinor GmbH & Co. KG PO box 301473 D-50784 Köln

customer: 165708


reference: SO9755

Page 9 of 11

front view

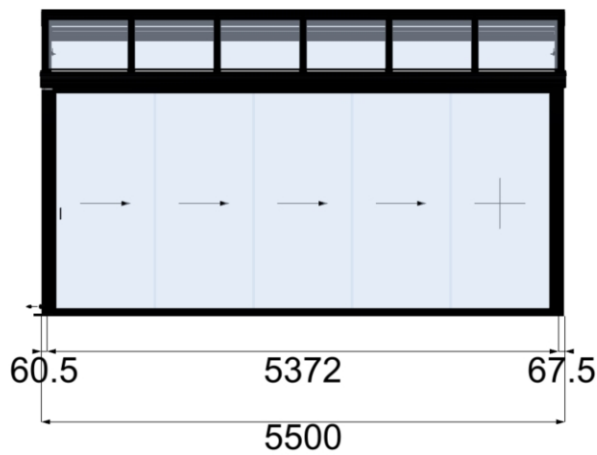

side view left

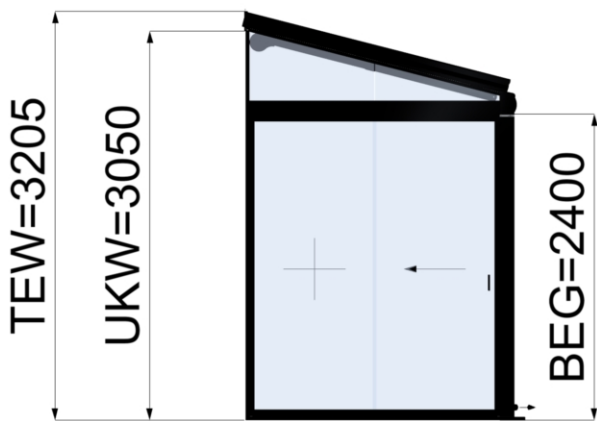

side view right




## Configuration details

weinor GmbH & Co. KG PO box 301473 D-50784 Köln

customer: 165708

reference: SO9755

Page 10 of 11

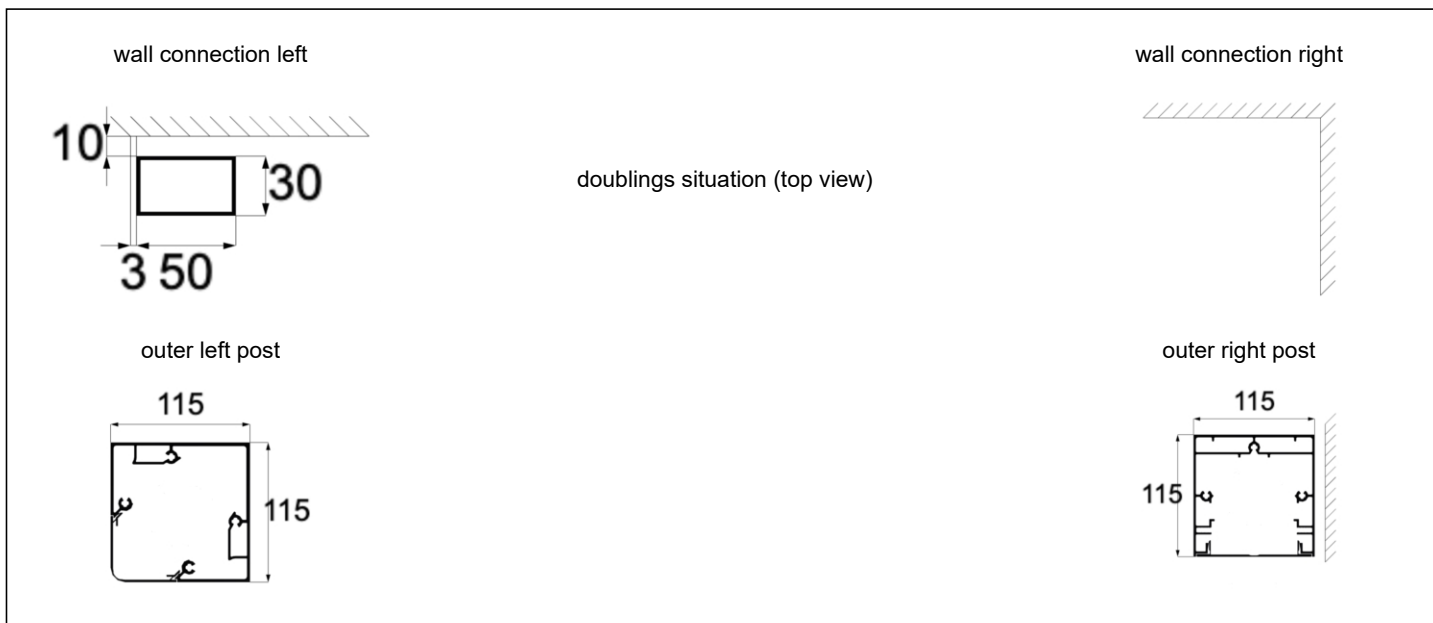

## Configuration details

weinor GmbH & Co. KG PO box 301473 D-50784 Köln

customer: 165708 reference: SO9755

Page 11 of 11

Note, these glass dimensions are not part of the order confirmation and are only part of the configuration from 20.4.2020.

### Glass Dimensions

| Position | 1               | Terrazza Originale / Plus | prepared for 10mm LSG           |             |              |
|----------|-----------------|---------------------------|---------------------------------|-------------|--------------|
| quantity | form            |                           | Width                           | Height left | Height right |
| 6        | rectangle       |                           | 857                             | 2086        | 2086         |
| Position | 2               | Side element LITE w50-c   | prepared for 6mm (for cold use) |             |              |
| quantity | form            |                           | Width                           | Height left | Height right |
| 1        | trapezium right |                           | 974                             | 56          | 306          |
| 1        | trapezium right |                           | 974                             | 307         | 557          |

