S011684 HOUZE

Measured 25/05/21

Custom Sail Survey - Option 02

SURVEY CHECKLIST: ***to be completed on site***

- ☐ All upper fitting points should be fixed to the underside of the ridge.
- ☐ All lower fitting points should be fixed to the top lip on the vertical recess.
- ☐ Points Q/E/F to be at midpoints of roof glazing panels.
- ☐ Points H/R/N/P/U/V/Y/A to be evenly split across their respective sail edges i.e.: LH=HR=RE. Next set J/C to be in-line with N/V.
- ☐ Points B/K/S/T to be at midpoints of roof glazing beams.
- ☐ No measurements for sail 05 are required.
- ☐ There will be no eye-plates at point D/G as these points will be floating, so no sticky dots to be positioned for these.

Confirmation required for the following:

- Colour of Fabric .....
- Colour of Fittings .....

Required Dims :

Sail 01-03		Sail 04		Sail 06	
AB	1006	LM	1380	EQ	1455
BC	1002	MN	695	QU	695
CF	1390	NP	695	UV	695
FJ	1390	PQ	695	VW	695
JK	1000	QE	1455	WX	1380
KH	1005	ER	695	XA	695
HE	1390	RH	695	AY	695
EA	1390	HL	695	YE	695
AC	1460	HM	1555	YQ	1620
AF	2010	HN	1655	YU	1455
CE	2010	HP	1610	YV	1610
EF	1455	LN	1610	EU	1610
EJ	2010	NR	1615	UA	1615
FH	2010	PE	1615	VX	1605
HJ	1460	PR	1455	VA	1455
		QR	1610	WA	1545

2086

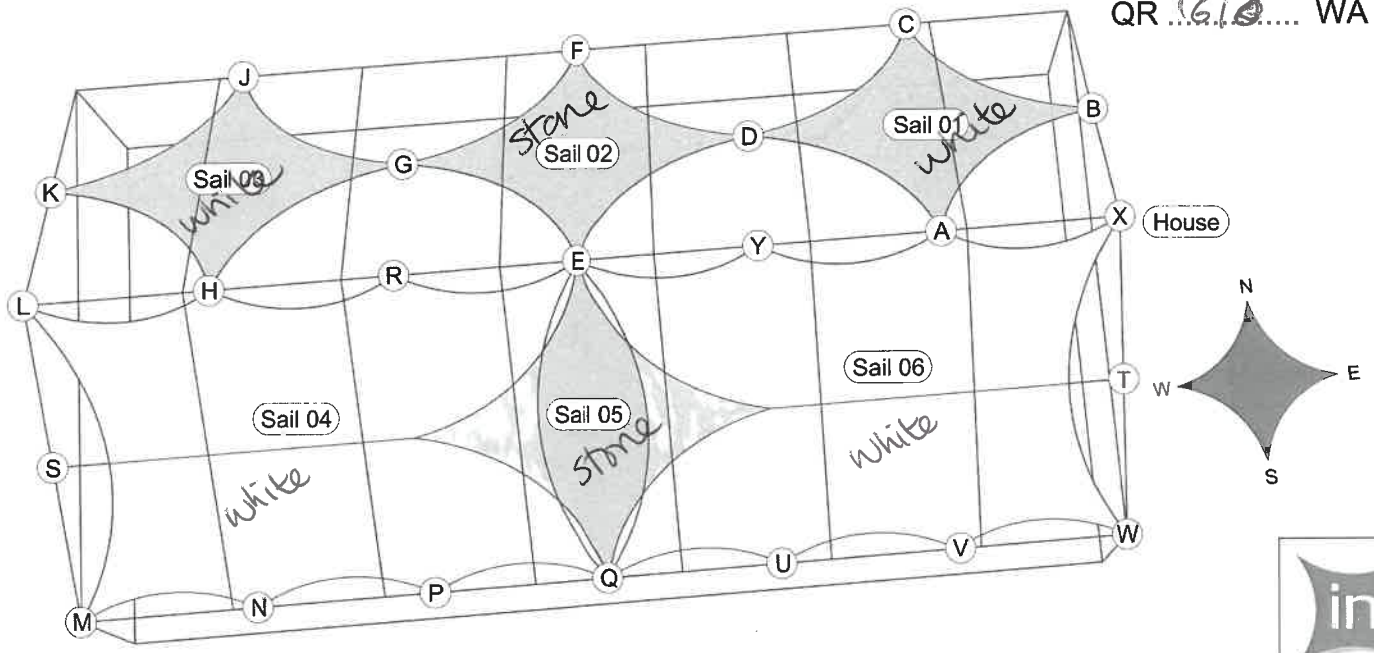

Notes:

Survey points to be taken from point on conservatory where eye plates are to be fixed.

MARK ALL POINTS BEFORE COMMENCING SURVEY

Dimensions should be taken as accurately as possible ideally +/-5mm

Any queries regarding this please contact us on 01786 450083

Design Shows:
6 x Made to Measure InShade Sails - ISX - TBC
(Sails are shown in Stone/Ivory for design clarity)

Obstructions: None

Special Fittings: HPS, Bow Shackles, Leader Wires

Some sails may require a colour matched seam, this will be confirmed on receipt of final dimensions.

t : 01786 450083 | e : inshade@shadeplus.co.uk

Project:	72292-8776-Houze				
Date:	12.05.21	Drawn:	AB	Check:	PB

inshade® The Original Sail Blind