



# ALUROLL

## ORDER CONFIRMATION : 83865


<b>Contact</b>	<b>Matt Barber</b>	<b>Invoice Address</b>	<b>Delivery Address</b>
<b>Your Ref</b>	<b>SO11973 Courtness</b>	<b>CP Interiors</b>	<b>CP Interiors</b>
<b>Date</b>	<b>19/07/2021</b>	<b>Rue Des Pres Trading Estate</b>	<b>DSV BARNES WALLIS ROAD SEGENSWORTH EAST IND EST</b>
		<b>St Saviour,</b>	<b>10 BRUNEL WAY</b>
		<b>Jersey,</b>	<b>FAREHAM</b>
		<b>JE2 7QN</b>	<b>PO15 5TX</b>
		<b>01534768141</b>	<b>01534768141</b>

Confirmed Delivery Date : 03/08/2021


Description	Price	Quantity	Total exc. VAT
M411 Vented - Tubular Motor (our ref 74582) Slat Type : M411 Vented Overall Width : 2900mm Overall Height : 1250mm Curtain colour : White (RAL9016) Box and guides : White (RAL9016) Fix Type : Internal Face Type of Operation : Electric Operation Motor Type :Somfy Motor Side :Left Override Motor : Override CSI Override Type : Internal High-Level Guide Type : 53 Motor Control Type : Wired SOMFY CONTROLS : Telis 1 RTS (white) MOTORS & BATTERY BACKUP : Somfy RTS Motor Upgrade	622.35	1.000	622.35
		Delivery	0.00
		Balance	622.35
		VAT	0.00
		TOTAL	622.35

We will be pre-drilling all garage door guides as standard from 1st June!


Please speak to the sales office if you would like to opt out.

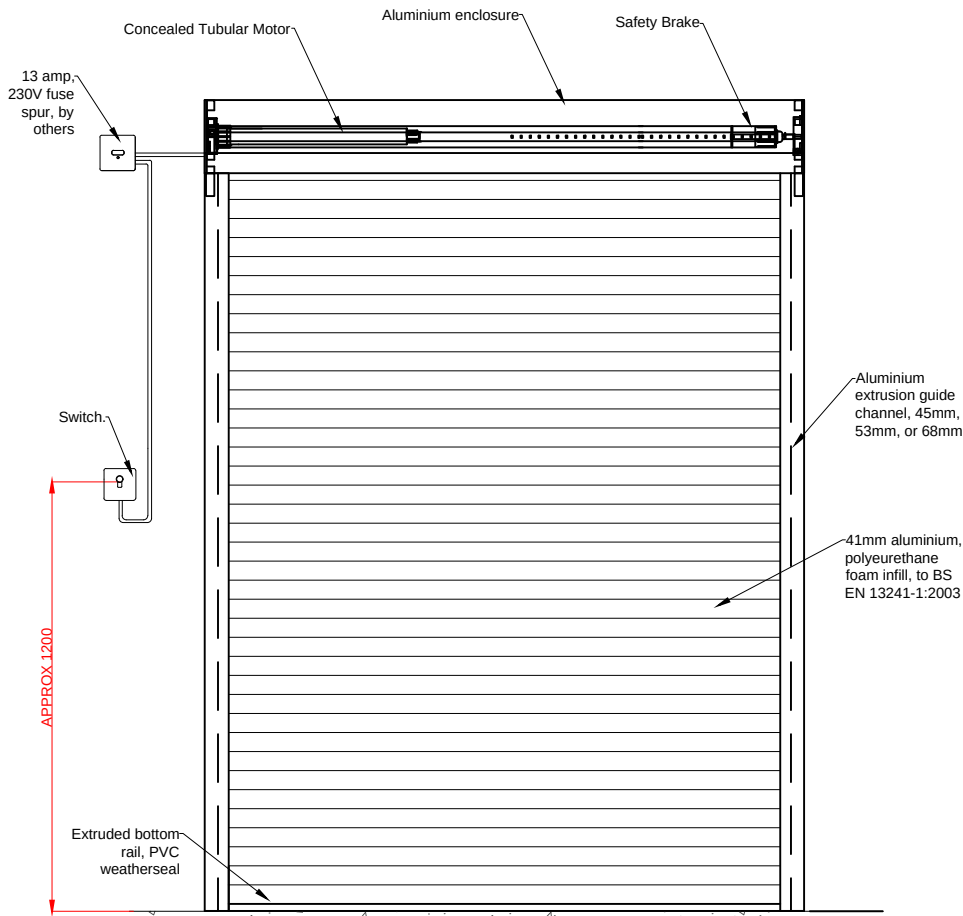

ELEVATION VIEWED FROM INSIDE

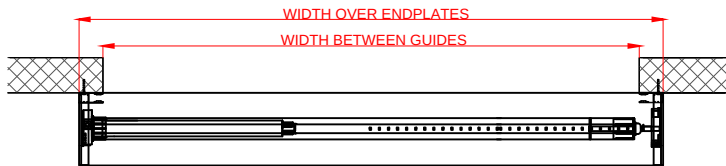

PLAN VIEW

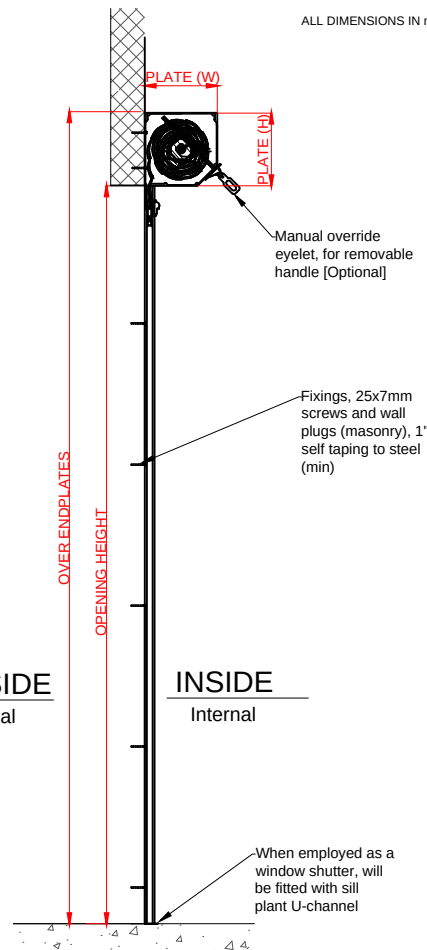

TYPICAL THROUGH SECTION

**NOTES**

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE THAT THE STRUCTURE IS CAPABLE OF ACCEPTING THE FIXINGS SHOWN AND SUPPORTING THE DOOR WEIGHT WHILST AT REST AND DURING OPERATION. STRUCTURAL SUPPORTS, E.G., STEEL OR TIMBER MUST BE SECURED AT HEAD AND FOOT. SEE WEIGHTS BELOW.

APPROX. CURTAIN WEIGHT (KG): 8  
 APPROX. BARREL WEIGHT (KG): 5  
 APPROX TOTAL DOOR WEIGHT (KG): 14

FULL ACCESS TO THE SHUTTER BOX MUST BE PROVIDED ACROSS THE OPENING, FOR MAINTENANCE / REPLACEMENT PURPOSES. IF FULL ACCESS IS NOT PROVIDED, THE INSTALLER WILL NOT ACCEPT ANY CHARGES ASSOCIATED WITH THE GAINING OF ACCESS TO FACILITATE THE MAINTENANCE OR REPLACEMENT OF ANY SHUTTER COMPONENTS.

ELECTRICAL OPERATION BY 230V MOTOR. CLIENT TO PROVIDE A 230V, SINGLE PHASE, 50HZ SUPPLY TERMINATING WITHIN ONE METER OF THE MOTOR POSITION.

WHEN MOUNTING ABOVE CEILING ALLOW 25MM CEILING TO ENDPLATE CLEARANCE.

CEILING TO GUIDE FACE CLEARANCE:

25mm UP TO 3000mm BETWEEN END PLATES  
 50mm OVER 3000mm UP TO 5000mm BETWEEN END PLATES  
 75mm OVER 5000mm UP TO 75mm BETWEEN END PLATES

NOTE: ACTUAL OPENING HEIGHT DEDUCT 50mm FROM OPENING HEIGHT TO ALLOW FOR BOTTOM SLAT LEAD INTO GUIDE TO CALCULATE ACTUAL OPENING / DAYLIGHT OPENING HEIGHT

WINDOW / DOOR SHUTTER WINDOW SHUTTERS (NOT SHOWN) SHOULD BE DESIGNED WITH A SILL PLANT UNDERNEATH THE GUIDE CHANNELS, INTO WHICH THE SHUTTER BOTTOM SLAT WILL DESCEND, PROVIDING ANTI-LIFT SECURITY.

WHERE WINDOW / DOOR HANDLES OR OTHER PROTRUDING ITEMS WILL AFFECT THE MOVEMENT OF THE SHUTTER, 25 OR 50MM ALUMINIUM PACKING IS RECOMMENDED.

WIDTH BETWEEN GUIDES	2794
BACK OF GUIDES	2900
WIDTH OVER ENDPLATES	2900
HEIGHT OVER ENDPLATES	1250
HEIGHT OPENING	1085
END PLATE HEIGHT	165
END PLATE WIDTH	165
MOTOR HAND	Left
FINISH	RAL9016

<SPECIAL INSTRUCTIONS>	



<b>Drawing Title:</b> M411 VENTED SECURITY SHUTTER, FACE FIXED, TUBULAR MOTOR	<b>Project. No.:</b> 83865-74582	<b>Client:</b> CP Interiors	<b>Date:</b> 24/06/2021	<b>By:</b> MB	<b>Rev:</b> 0	<b>Date</b>	<b>Revision</b>