



ALUROLL

ORDER CONFIRMATION : 83864


Contact	Matt Barber	Invoice Address	Delivery Address
Your Ref	SO11990 Moorings Hotel	CP Interiors	CP Interiors
Date	21/07/2021	Rue Des Pres Trading Estate	DSV BARNES WALLIS ROAD SEGENSWORTH EAST IND EST
		St Saviour,	10 BRUNEL WAY
		Jersey,	FAREHAM
		JE2 7QN	PO15 5TX
		01534768141	01534768141

Confirmed Delivery Date : 03/08/2021


Description	Price	Quantity	Total exc. VAT
V37 - Manual Spring & Lock (our ref 76281) Slat Type : V37 Overall Width : 4000mm Overall Height : 1165mm Curtain colour : Black (RAL9005) Box and guides : Black (RAL9005) Fix Type : Internal Reveal Type of Operation : Spring & Lock Operation Guide Type : 53 Vision Profile Shutter	809.10	1.000	809.10
		Delivery	0.00
		Balance	809.10
		VAT	0.00
		TOTAL	809.10

We will be pre-drilling all garage door guides as standard from 1st June!


Please speak to the sales office if you would like to opt out.

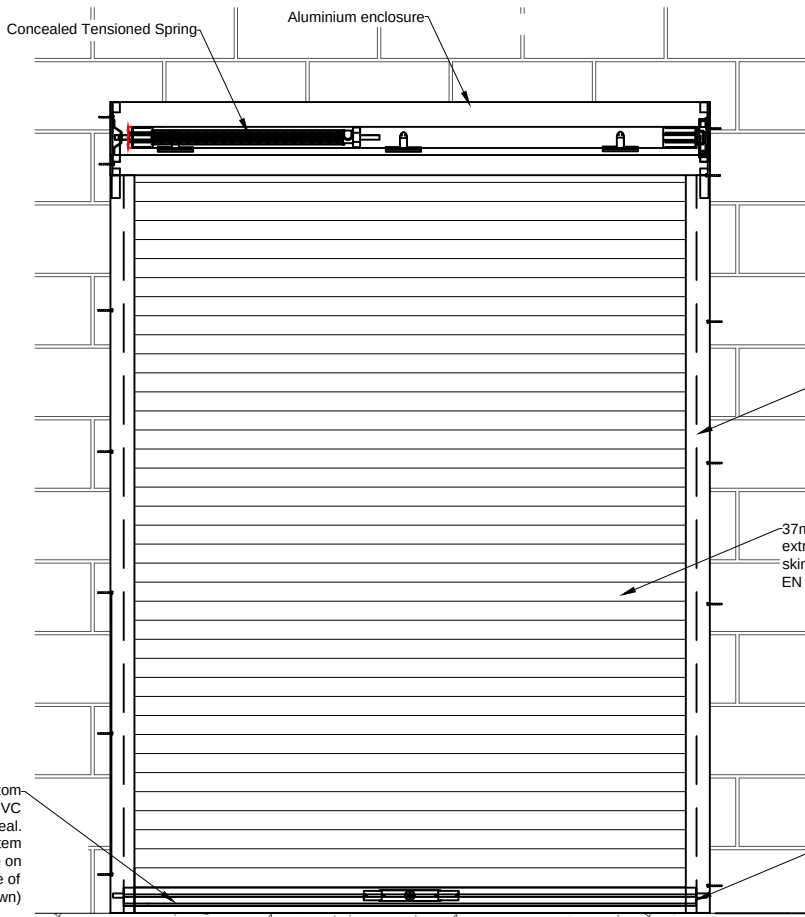

ELEVATION VIEWED FROM INSIDE

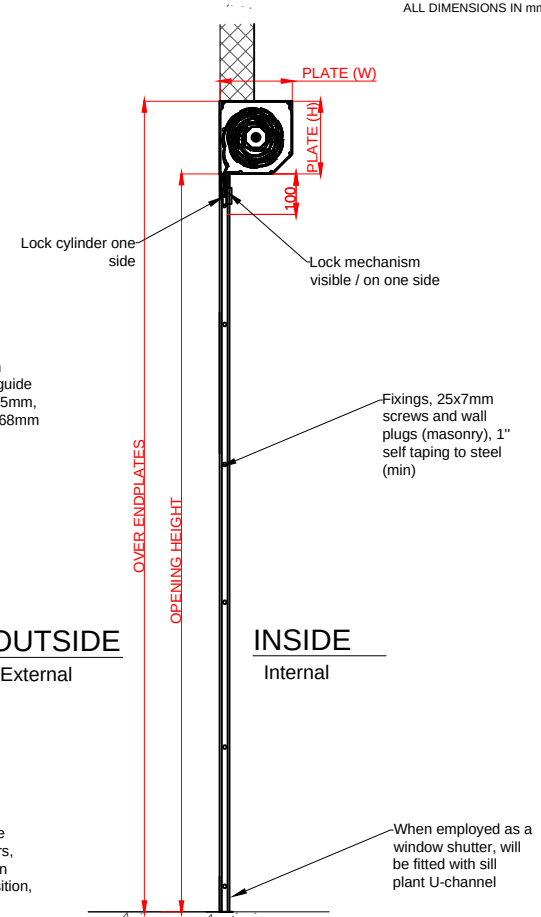

TYPICAL THROUGH SECTION

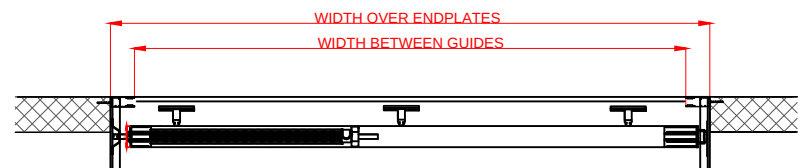

PLAN VIEW

ALL DIMENSIONS IN mm

NOTES

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE THAT THE STRUCTURE IS CAPABLE OF ACCEPTING THE FIXINGS SHOWN AND SUPPORTING THE DOOR WEIGHT WHILST AT REST AND DURING OPERATION. STRUCTURAL SUPPORTS, E.G., STEEL OR TIMBER MUST BE SECURED AT HEAD AND FOOT. SEE WEIGHTS BELOW.

APPROX. CURTAIN WEIGHT (KG): 26
 APPROX. BARREL WEIGHT (KG): 10
 APPROX TOTAL DOOR WEIGHT (KG): 39

FULL ACCESS TO THE SHUTTER BOX MUST BE PROVIDED ACROSS THE OPENING, FOR MAINTENANCE / REPLACEMENT PURPOSES. IF FULL ACCESS IS NOT PROVIDED, THE INSTALLER WILL NOT ACCEPT ANY CHARGES ASSOCIATED WITH THE GAINING OF ACCESS TO FACILITATE THE MAINTENANCE OR REPLACEMENT OF ANY SHUTTER COMPONENTS.

ELECTRICAL OPERATION BY 230V MOTOR. CLIENT TO PROVIDE A 230V, SINGLE PHASE, 50HZ SUPPLY TERMINATING WITHIN ONE METER OF THE MOTOR POSITION.

WHEN MOUNTING ABOVE CEILING ALLOW 25MM CEILING TO ENDPLATE CLEARANCE.

CEILING TO GUIDE FACE CLEARANCE:

25mm UP TO 3000mm BETWEEN END PLATES
 50mm OVER 3000mm UP TO 5000mm BETWEEN END PLATES
 75mm OVER 5000mm UP TO 7500mm BETWEEN END PLATES

NOTE: ACTUAL OPENING HEIGHT DEDUCT 50mm FROM OPENING HEIGHT TO ALLOW FOR BOTTOM SLAT LEAD INTO GUIDE TO CALCULATE ACTUAL OPENING / DAYLIGHT OPENING HEIGHT

WINDOW / DOOR SHUTTER WINDOW SHUTTERS (NOT SHOWN) SHOULD BE DESIGNED WITH A SILL PLANT UNDERNEATH THE GUIDE CHANNELS, INTO WHICH THE SHUTTER BOTTOM SLAT WILL DESCEND, PROVIDING ANTI-LIFT SECURITY.

WHERE WINDOW / DOOR HANDLES OR OTHER PROTRUDING ITEMS WILL AFFECT THE MOVEMENT OF THE SHUTTER, 25 OR 50MM ALUMINIUM PACKING IS RECOMMENDED.

WIDTH BETWEEN GUIDES	3894
BACK OF GUIDES	4000
WIDTH OVER ENDPLATES	4000
HEIGHT OVER ENDPLATES	1165
HEIGHT OPENING	1000
END PLATE HEIGHT	165
END PLATE WIDTH	165
MOTOR HAND	N/A
FINISH	RAL9005

<SPECIAL INSTRUCTIONS>



Drawing Title:	Project. No:	Client:	Date:	By:	Rev:	Date	Revision
V37 SECURITY SHUTTER, REVEAL FIXED, SPRING & LOCK	83864-76281	CP Interiors	14/07/2021	MB	0		