



ALUROLL

ORDER CONFIRMATION : 95038

Contact	Matt Barber	Invoice Address	Delivery Address
Your Ref	12753 x 2	CP Interiors	CP Interiors
Date	24/03/2022	Rue Des Pres Trading Estate	DSV BARNES WALLIS ROAD SEGENSWORTH EAST IND EST
		St Saviour,	10 BRUNEL WAY
		Jersey,	FAREHAM
		JE2 7QN	PO15 5TX
		01534768141	01534768141

Confirmed Delivery Date : 05/04/2022

Description	Price	Quantity	Total exc. VAT
T77 - Tubular Motor (our ref 92703) Slat Type : T77 Overall Width : 2140mm Overall Height : 1450mm Curtain colour : Laminate White (LWH) Box and guides : White (RAL9016) Fix Type : Internal Face Type of Operation : Electric Operation Motor Type :Somfy Motor Side :Right Override Motor : Override RTS Override Type : Internal High-Level Guide Type : 70 Motor Control Type : Wireless SOMFY CONTROLS : Somfy Smoove 1 RTS Wireless Wall Switch (white with frame) MOTORS & BATTERY BACKUP : Somfy RTS Motor Upgrade	787.05	1.000	787.05
T77 - Tubular Motor (our ref 92704) Slat Type : T77 Overall Width : 3680mm Overall Height : 1450mm Curtain colour : Laminate White (LWH) Box and guides : White (RAL9016) Fix Type : Internal Face Type of Operation : Electric Operation Motor Type :Somfy Motor Side :Right Override Motor : Override RTS Override Type : Internal High-Level Guide Type : 90 Motor Control Type : Wireless SOMFY CONTROLS : Somfy Smoove 1 RTS Wireless Wall Switch (white with frame) MOTORS & BATTERY BACKUP : Somfy RTS Motor Upgrade	1,078.11	1.000	1078.11
		Delivery	0.00
		Balance	1865.16
		VAT	0.00
		TOTAL	1865.16




ALUROLL

ORDER CONFIRMATION : 95038


We are now pre-drilling all guides as standard, unless otherwise specified.

Please speak to the sales office if you would like to opt out.

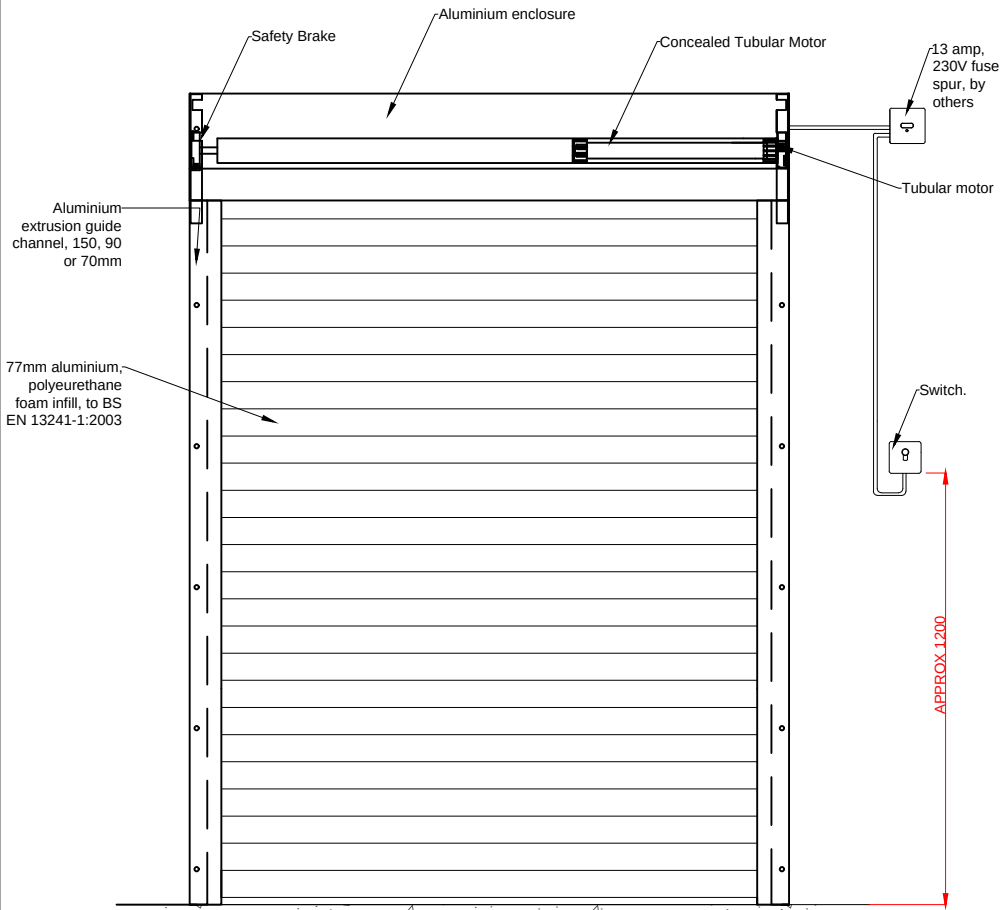


ELEVATION VIEWED FROM INSIDE

Guide width:

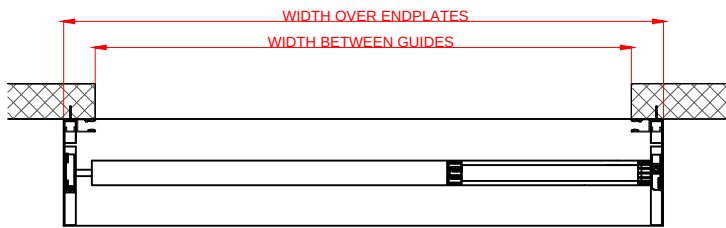

PLAN VIEW

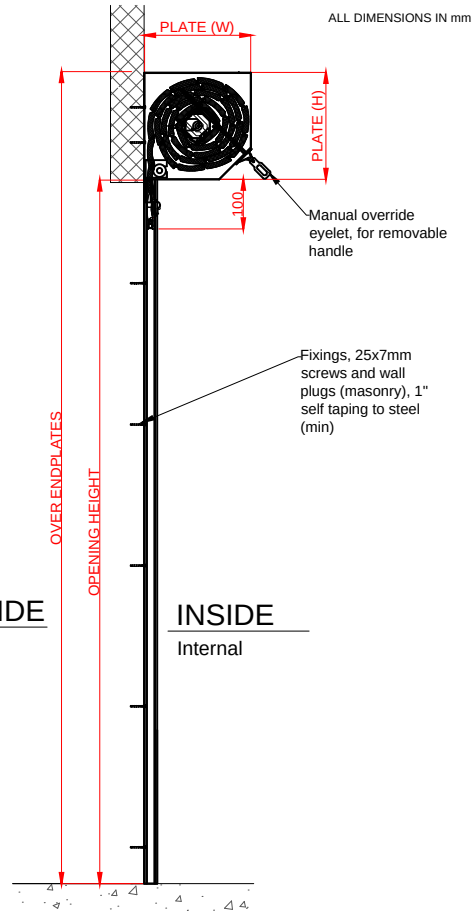

TYPICAL THROUGH SECTION

ALL DIMENSIONS IN mm

NOTES

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE THAT THE STRUCTURE IS CAPABLE OF ACCEPTING THE FIXINGS SHOWN AND SUPPORTING THE DOOR WEIGHT WHILE AT REST AND DURING OPERATION. STRUCTURAL SUPPORTS, E.G. STEEL OR TIMBER MUST BE SECURED AT HEAD AND FOOT. SEE WEIGHTS BELOW.

APPROX. CURTAIN WEIGHT (KG): 13
 APPROX. BARREL WEIGHT (KG): 5
 APPROX TOTAL DOOR WEIGHT (KG): 19

FULL ACCESS TO THE SHUTTER BOX MUST BE PROVIDED ACROSS THE OPENING, FOR MAINTENANCE / REPLACEMENT PURPOSES. IF FULL ACCESS IS NOT PROVIDED, THE INSTALLER WILL NOT ACCEPT ANY CHARGES ASSOCIATED WITH THE GAINING OF ACCESS TO FACILITATE THE MAINTENANCE OR REPLACEMENT OF ANY SHUTTER COMPONENTS.

ELECTRICAL OPERATION BY 230V MOTOR. CLIENT TO PROVIDE A 230V, SINGLE PHASE, 50HZ SUPPLY TERMINATING WITHIN ONE METER OF THE MOTOR POSITION.

WHEN MOUNTING ABOVE CEILING ALLOW 25MM CEILING TO ENDPLATE CLEARANCE.

CEILING TO GUIDE FACE CLEARANCE:

25mm UP TO 3000mm BETWEEN END PLATES
 50mm OVER 3000mm UP TO 5000mm BETWEEN END PLATES
 75mm OVER 5000mm UP TO 75mm BETWEEN END PLATES


NOTE: ACTUAL OPENING HEIGHT DEDUCT 100mm FROM OPENING HEIGHT TO ALLOW FOR BOTTOM SLAT LEAD INTO GUIDE TO CALCULATE ACTUAL OPENING / DAYLIGHT OPENING HEIGHT

WIDTH BETWEEN GUIDES	2000
BACK OF GUIDES	2140
WIDTH OVER ENDPLATES	2140
HEIGHT OVER ENDPLATES	1450
HEIGHT OPENING	1200
END PLATE HEIGHT	250
END PLATE WIDTH	250
MOTOR HAND	Right
FINISH	LWH

<SPECIAL_INSTRUCTIONS>




Drawing Title:	Project. No:	Client:	Date:	By:	Rev:	Date	Revision
T77 SHUTTER, FACE FIXED, TUBULAR MOTOR	95038-92703	CP Interiors	23/03/2022	MB	0		

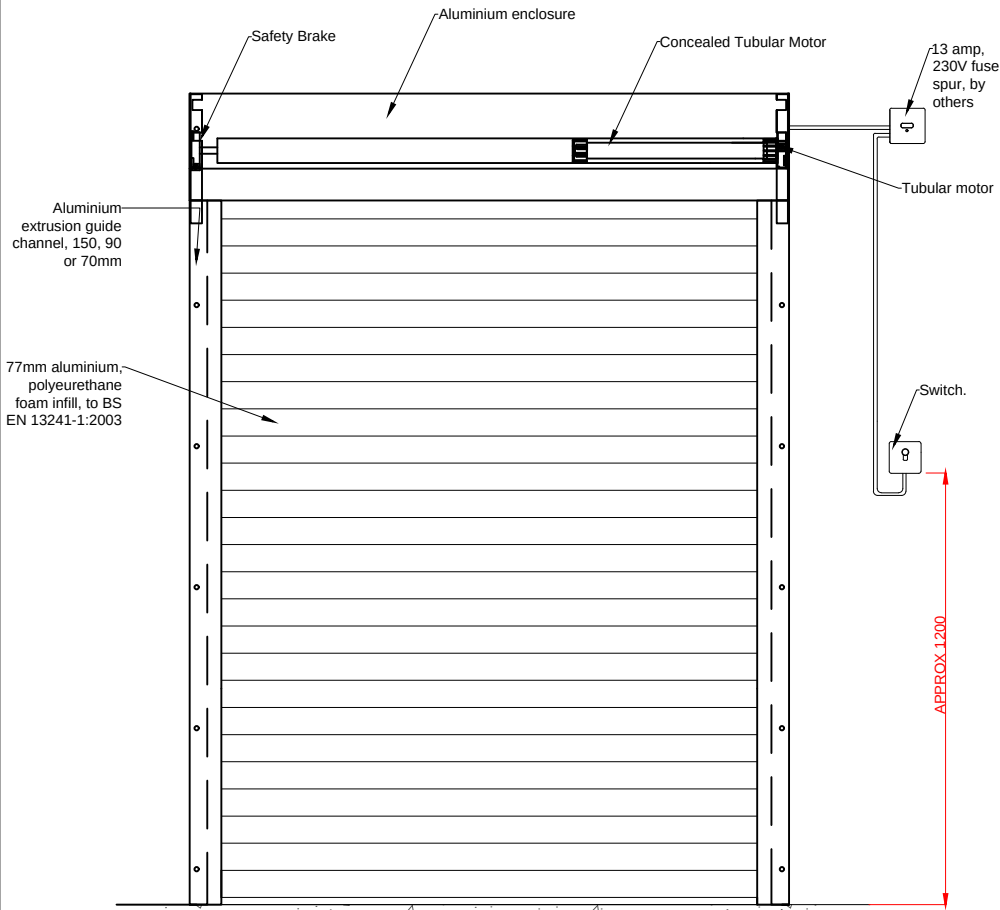


ELEVATION VIEWED FROM INSIDE

Guide width:

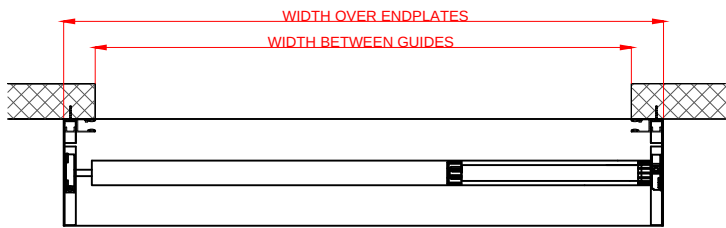

PLAN VIEW

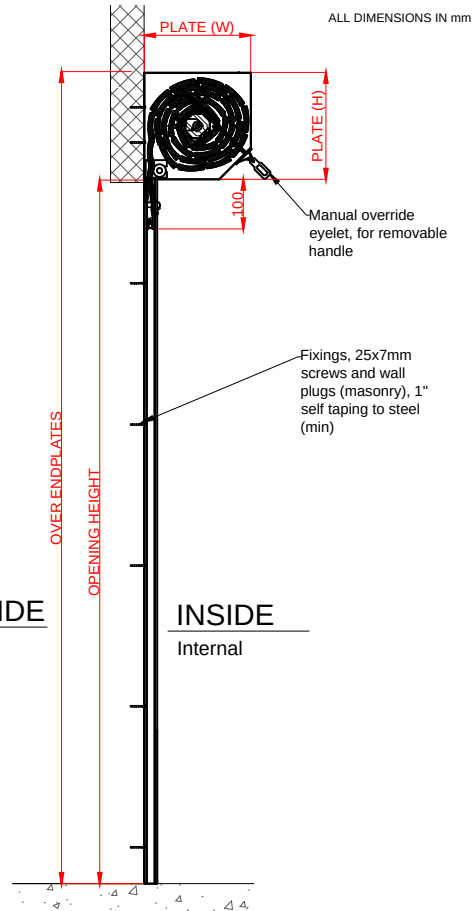

TYPICAL THROUGH SECTION

NOTES

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE THAT THE STRUCTURE IS CAPABLE OF ACCEPTING THE FIXINGS SHOWN AND SUPPORTING THE DOOR WEIGHT WHILST AT REST AND DURING OPERATION. STRUCTURAL SUPPORTS, E.G. STEEL OR TIMBER MUST BE SECURED AT HEAD AND FOOT. SEE WEIGHTS BELOW.

APPROX. CURTAIN WEIGHT (KG): 22
 APPROX. BARREL WEIGHT (KG): 11
 APPROX TOTAL DOOR WEIGHT (KG): 35

FULL ACCESS TO THE SHUTTER BOX MUST BE PROVIDED ACROSS THE OPENING, FOR MAINTENANCE / REPLACEMENT PURPOSES. IF FULL ACCESS IS NOT PROVIDED, THE INSTALLER WILL NOT ACCEPT ANY CHARGES ASSOCIATED WITH THE GAINING OF ACCESS TO FACILITATE THE MAINTENANCE OR REPLACEMENT OF ANY SHUTTER COMPONENTS.

ELECTRICAL OPERATION BY 230V MOTOR. CLIENT TO PROVIDE A 230V, SINGLE PHASE, 50HZ SUPPLY TERMINATING WITHIN ONE METER OF THE MOTOR POSITION.

WHEN MOUNTING ABOVE CEILING ALLOW 25MM CEILING TO ENDPLATE CLEARANCE.

CEILING TO GUIDE FACE CLEARANCE:

25mm UP TO 3000mm BETWEEN END PLATES
 50mm OVER 3000mm UP TO 5000mm BETWEEN END PLATES
 75mm OVER 5000mm UP TO 75mm BETWEEN END PLATES

NOTE: ACTUAL OPENING HEIGHT DEDUCT 100mm FROM OPENING HEIGHT TO ALLOW FOR BOTTOM SLAT LEAD INTO GUIDE TO CALCULATE ACTUAL OPENING / DAYLIGHT OPENING HEIGHT

WIDTH BETWEEN GUIDES	3500
BACK OF GUIDES	3680
WIDTH OVER ENDPLATES	3680
HEIGHT OVER ENDPLATES	1450
HEIGHT OPENING	1200
END PLATE HEIGHT	250
END PLATE WIDTH	250
MOTOR HAND	Right
FINISH	LWH

<SPECIAL_INSTRUCTIONS>



Drawing Title:	Project. No:	Client:	Date:	By:	Rev:	Date	Revision
T77 SHUTTER, FACE FIXED, TUBULAR MOTOR	95038-92704	CP Interiors	23/03/2022	MB	0		