



ALUROLL

ORDER CONFIRMATION : 105029


Contact	Matt Barber	Invoice Address	Delivery Address
Your Ref	SO14017	CP Interiors	CP Interiors
Date	13/01/2023	Rue Des Pres Trading Estate	DSV BARNES WALLIS ROAD SEGENSWORTH EAST IND EST
		St Saviour,	10 BRUNEL WAY
		Jersey,	FAREHAM
		JE2 7QN	PO15 5TX
		01534768141	01534768141

Confirmed Delivery Date : 18/01/2023


Description	Price	Quantity	Total exc. VAT
M511 Vented - Tubular Motor (our ref 111270) Slat Type : M511 Vented Overall Width : 3750mm Overall Height : 1905mm Curtain colour : White (RAL9016) Box and guides : White (RAL9016) Fix Type : Internal Face Type of Operation : Electric Operation Motor Type :Somfy Motor Side :Left Override Motor : Override RTS Override Type : Internal High-Level Guide Type : 65 Motor Control Type : Wireless MOTORS & BATTERY BACKUP : Somfy RTS Motor Upgrade SOMFY CONTROLS : Telis 1 RTS (white)	963.00	1.000	963.00
		Delivery	0.00
		Balance	963.00
		VAT	0.00
		TOTAL	963.00

We are now pre-drilling all guides as standard, unless otherwise specified.


Please speak to the sales office if you would like to opt out.

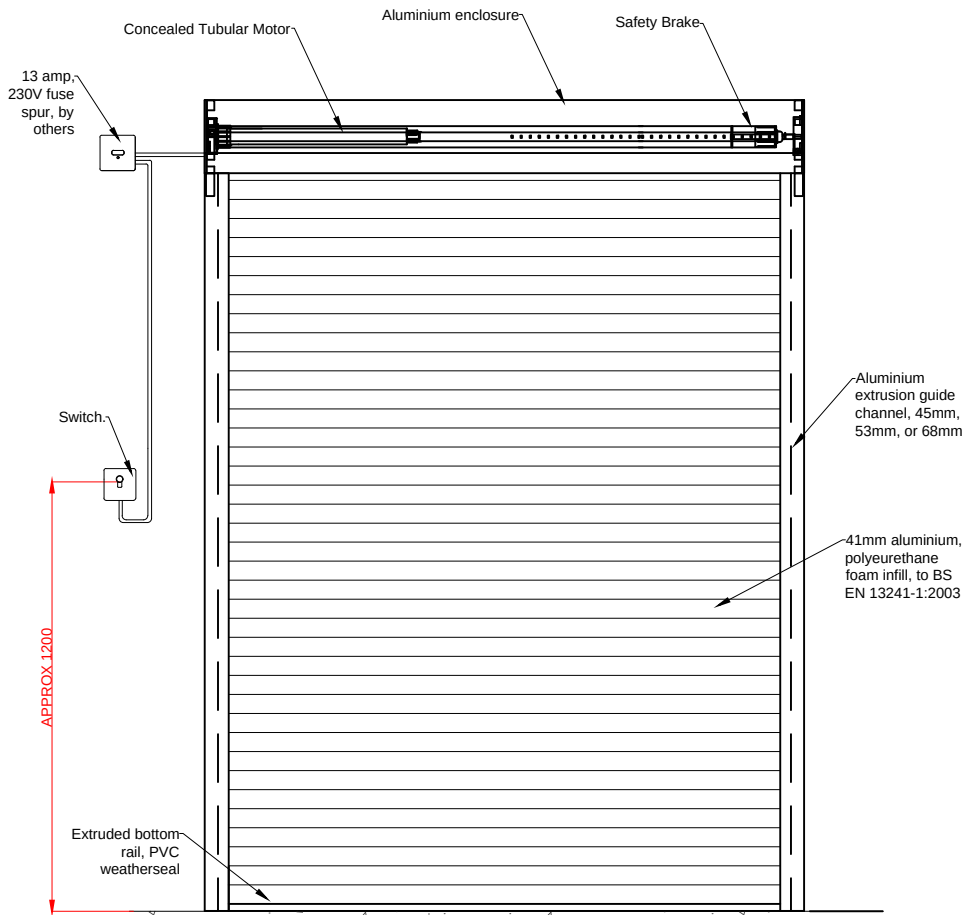

ELEVATION VIEWED FROM INSIDE

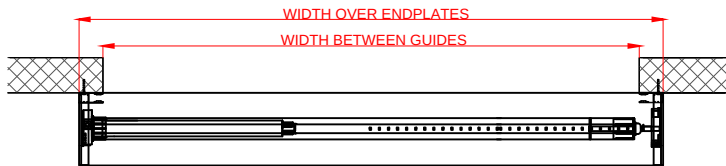

PLAN VIEW

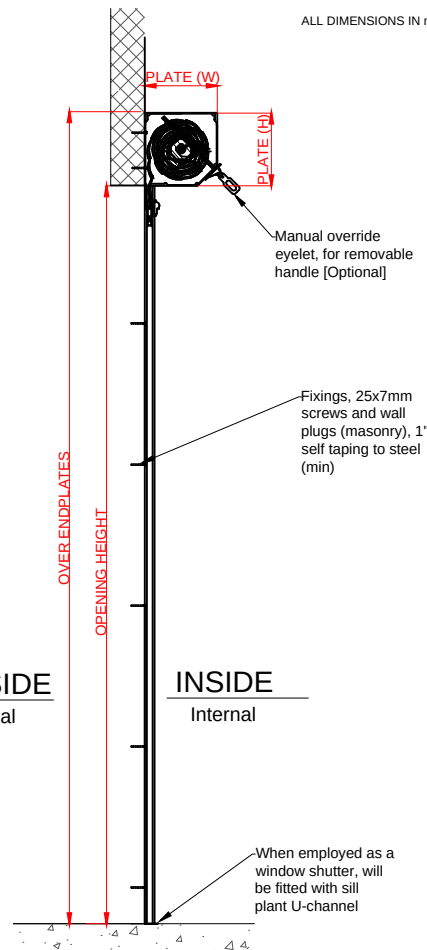

TYPICAL THROUGH SECTION

WIDTH BETWEEN GUIDES	3620
BACK OF GUIDES	3750
WIDTH OVER ENDPLATES	3750
HEIGHT OVER ENDPLATES	1905
HEIGHT OPENING	1700
END PLATE HEIGHT	205
END PLATE WIDTH	205
MOTOR HAND	Left
FINISH	RAL9016

NOTES

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE THAT THE STRUCTURE IS CAPABLE OF ACCEPTING THE FIXINGS SHOWN AND SUPPORTING THE DOOR WEIGHT WHILST AT REST AND DURING OPERATION. STRUCTURAL SUPPORTS, E.G., STEEL OR TIMBER MUST BE SECURED AT HEAD AND FOOT. SEE WEIGHTS BELOW.

APPROX. CURTAIN WEIGHT (KG): 32
 APPROX. BARREL WEIGHT (KG): 9
 APPROX TOTAL DOOR WEIGHT (KG): 45

FULL ACCESS TO THE SHUTTER BOX MUST BE PROVIDED ACROSS THE OPENING, FOR MAINTENANCE / REPLACEMENT PURPOSES. IF FULL ACCESS IS NOT PROVIDED, THE INSTALLER WILL NOT ACCEPT ANY CHARGES ASSOCIATED WITH THE GAINING OF ACCESS TO FACILITATE THE MAINTENANCE OR REPLACEMENT OF ANY SHUTTER COMPONENTS.

ELECTRICAL OPERATION BY 230V MOTOR. CLIENT TO PROVIDE A 230V, SINGLE PHASE, 50HZ SUPPLY TERMINATING WITHIN ONE METER OF THE MOTOR POSITION.

WHEN MOUNTING ABOVE CEILING ALLOW 25MM CEILING TO ENDPLATE CLEARANCE.

CEILING TO GUIDE FACE CLEARANCE:

25mm UP TO 3000mm BETWEEN END PLATES
 50mm OVER 3000mm UP TO 5000mm BETWEEN END PLATES
 75mm OVER 5000mm UP TO 75mm BETWEEN END PLATES

NOTE: ACTUAL OPENING HEIGHT DEDUCT 50mm FROM OPENING HEIGHT TO ALLOW FOR BOTTOM SLAT LEAD INTO GUIDE TO CALCULATE ACTUAL OPENING / DAYLIGHT OPENING HEIGHT

WINDOW / DOOR SHUTTER WINDOW SHUTTERS (NOT SHOWN) SHOULD BE DESIGNED WITH A SILL PLANT UNDERNEATH THE GUIDE CHANNELS, INTO WHICH THE SHUTTER BOTTOM SLAT WILL DESCEND, PROVIDING ANTI-LIFT SECURITY.

WHERE WINDOW / DOOR HANDLES OR OTHER PROTRUDING ITEMS WILL AFFECT THE MOVEMENT OF THE SHUTTER, 25 OR 50MM ALUMINIUM PACKING IS RECOMMENDED.

<SPECIAL INSTRUCTIONS>



Drawing Title:
M411 VENTED SECURITY SHUTTER, FACE FIXED, TUBULAR MOTOR

Project. No: 105029-111270
 Client: CP Interiors

Date: 20/12/2022
 By: MB
 Rev: 0
 Date Revision