


GROCOTT - TO BE BOOKED IN FOR CSS.

1.5h2x2

Custom Sail Survey - Option 01

Required Dims :

Sail 01	Sail 02	Sail 03	Sail 04
AB 2310	AE 2100	AH 2300	AL 2100
BC 2415	EF 2555	HJ 2425	LM 2560
CD 2558	FG 2425	JK 2555	MN 2425
DA 2100	GA 2300	KA 2120	AA 2310
			AN 2310
BD 3555	EG 3555	HK 3550	AM 2860
AC 2850	AF 2850	AJ 2850	LN 3560
		AY 1360	AZ 1360
		JY 1790	LZ 1220
		KY 1190	MZ 1760

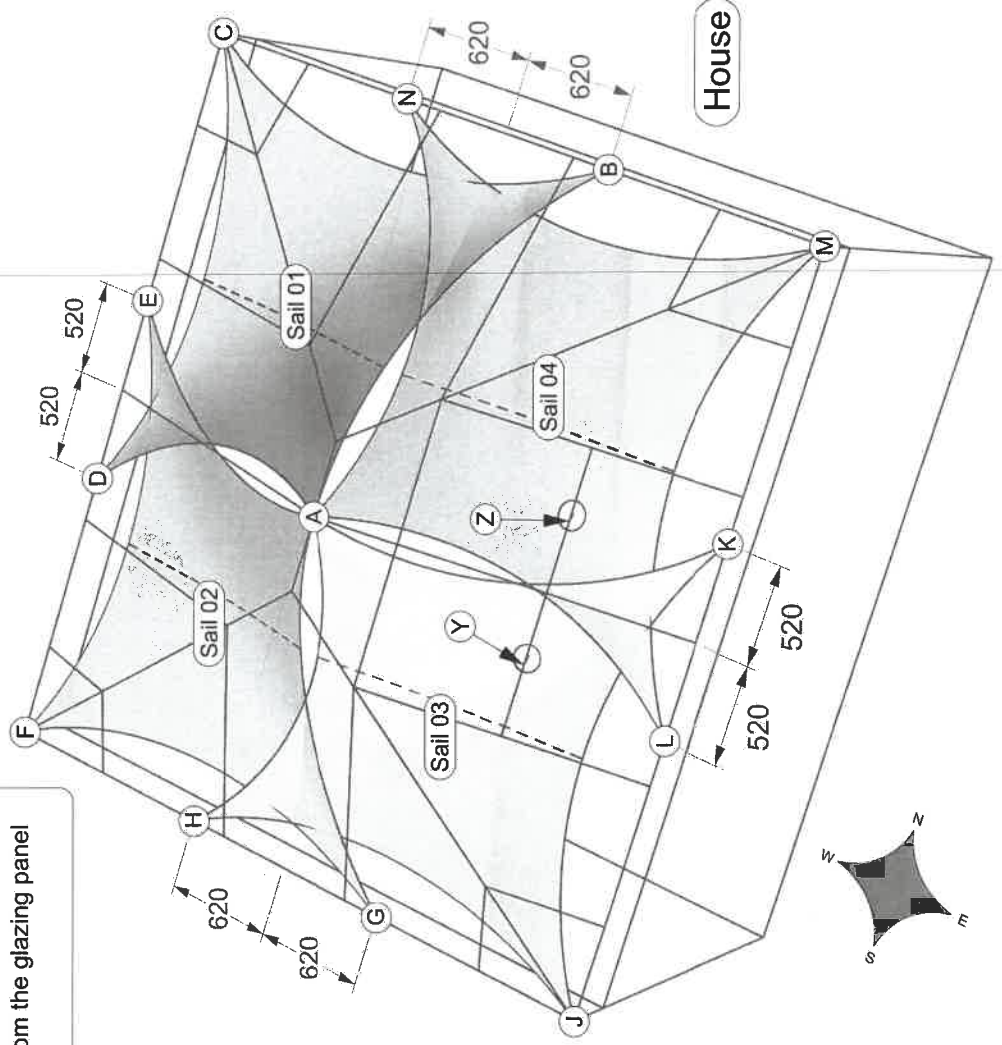

SURVEY CHECKLIST: ***to be completed on site***

- Point A to be at midpoint of ridge.
- All lower fitting points should be fixed to the top of plasterboard.
- Corner points F/J/M/C to be on the South/North facing side.
- Point Y/Z to be taken from the vent opener screw with the window in the closed position as per inset photo.
- Points D/E/L/K to be set at 520mm away from the glazing bar.
- Points H/G/B/N to be set at 620mm away from the glazing panel midpoint.

Confirmation required for the following:

- Colour of Fabric **White**
- Colour of Fittings **Stainless Steel**
(Please note white & gold fittings carry a surcharge of £2+VAT per sail corner.)

Notes:	
Survey points to be taken from point on conservatory where eye plates are to be fixed.	
MARK ALL POINTS BEFORE COMMENCING SURVEY	
Dimensions should be taken as accurately as possible ideally +/-5mm	
Design Shows: 4 x Made to Measure InShade Sails - ISX - TBC (Sails are shown in Ivory for design clarity)	
Obstructions: Openers	
Special Fittings: None	
t : 01786 450083	e : inshade@shadeplus.co.uk
Project: 72292-9807-Grocott	
Date: 26.05.23	Drawn: AB
	Check: --

