

Control systems Somfy Order form

 Quote/offer Order

weinor GmbH & Co. KG
Fax: +49(0)221/59709-898
E-mail: order@weinor.de

Order number/reference SO14825 O'CONNOR

Customer name

CP INTERIORS

Order date

Customer requested delivery date

Different delivery address to normal/miscellaneous

Customer number

1 6 5 7 0 8

The order is placed according to the valid general terms of delivery and payment of weinor.

weinor sales representative

Signature

* The deduction dimension is increased by 2 cm for Somfy Eolis 3D WirFree io/RTS.
Projection = width - (deduction dimension X + 2 cm).

available
 not available

Kubata/LED	Opal Design II/LED	Semina Life/LED	Cassita II/LED	I/K/N 2000	Semina	Topas	weinor PergoTex II/LED	Plaza Viva/LED	VertiTex II/WeiTop	WGM Top	Sothezza II/LED	LED/LED Design/3Spot	Tempura/Quadra	Terrazza Pure
------------	--------------------	-----------------	----------------	------------	--------	-------	------------------------	----------------	--------------------	---------	-----------------	----------------------	----------------	---------------

System Somfy hard wired

<input type="checkbox"/> Sun and wind sensor (Soliris Smoove Uno) with control unit	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Rain sensor Ondeis 230V AC	•	•	•	•	•	•	•	•	•	•	•	•	•	•

System Somfy io-homecontrol*

<input type="checkbox"/> Sunea io (drive for awnings, directly built-in)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Sunea io (drive for Valance Plus, directly built-in)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Radio transmitter and control system														
<input type="checkbox"/> Hand transmitter Situo 1 io Pure II	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Hand transmitter Situo 5 io Pure II	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Hand transmitter Situo 5 Variation A/M io Pure II	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Wall transmitter Smoove 1 io Pure Shine	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> TaHomaSwitch	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sensors														
<input type="checkbox"/> Eolis WireFree io (battery-operated, radio wind sensor)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Sunis WireFree io II (radio sun sensor for facade)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Lighting Receiver Variation io (dimmmable) incl. power supply pack	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Lightning Receiver Variation on/off io (not dimmmable)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Lighting Receiver Variation io 12V/24V RGBW (dimmmable)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Power supply pack 24V 100 W	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Power supply pack 24V 240 W	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Radio control Awning Slim Receiver io Plug	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Heating Receiver Variation io 1.5 kW STAS3/STAK3 (dimmmable)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Wind sensor Eolis 3D WireFree io, white*	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Accessories/radio receiver

<input type="checkbox"/> LED power supply pack KI-45700-A-DIM-C	•	•	•	•	•	•	•	•	•	•	•	•	•	•
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

System Somfy RTS

<input type="checkbox"/> Somfy RTS motor upgrade (surcharge applies if installed directly into weinor awnings)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Radio transmitter and control system														
<input type="checkbox"/> Hand transmitter Situo 1 RTS Pure II (1 channel)/Situo 5 RTS Pure II (5 channel)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Hand transmitter Situo 1 Soliris RTS Pure II (1 channel)/Situo 5 Soliris RTS Pure II (5 channel)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Hand transmitter Telis 16 RTS Pure (16 channel)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Wall transmitter Smoove 1 RTS Pure Shine	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Chronis RTS smart, radio timer system to control the Tempura	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sensors														
<input type="checkbox"/> Rain sensor Ondeis 230V AC	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Eolis Sensor RTS (radio wind sensor)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input checked="" type="checkbox"/> Soliris Sensor RTS (radio wind/sun sensor)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Soliris Sensor RTS with connection for rain sensor	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Wind sensor Eolis 3D WireFree RTS, white*	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Radio receiver														
<input type="checkbox"/> Lighting slim receiver RTS (version weinor, LED not dimmmable)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Universal slim receiver RTS Plug (Valance Plus + VertiTex II)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Universal, external radio receiver RTS for retrofitting a wired drive with radio control option for surface mounting (can be combined with Eolis/Soliris sensor RTS)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Heating Slim Receiver RTS Plug, not dimmmable	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Accessories for wired drives (net price)

<input type="checkbox"/> Adjustment kit Becker with coupling element (for Becker and Somfy drives)	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<input type="checkbox"/> Test run cable Somfy incl. adjustment kit for radio drives and wired drives (for Becker/Somfy)	•	•	•	•	•	•	•	•	•	•	•	•	•	•

weinor GmbH & Co. KG
Fax: +49 (0) 221/597 09-898
E-mail: order@weinor.de

Quote/offer Order

Customer name

CP INTERIORS

Customer number

1 6 5 7 0 8

weinor sales representative

Order number/reference

SO14825 O'CONNOR

Order date

Customer requested delivery date

Different delivery address to normal/miscellaneous

WGM Top Stretch

WGM Top OptiStretch

Quantity

Quantity 3

Supply front profile loose

Supply front profile assembled (standard)

Order suitable for Terrazza roof order no.

Number of units 1 2 3

Axial dimension A1 513.9 cm Projection B1 450 cm

Details only for multi-section units

Axial dimension A2 214.4 cm Projection B2 400 cm

Axial dimension A3 513.9 cm Projection B3 400 cm

Frame colour

RAL colour Trend colour

Colour name RAL7032 PEBBLE

Fabric

Fabric sewn with PTFE yarn

Pattern no. P8-374 Cloud

With BiConnect radio control

yes no


Motor drive (viewed from the outside)

Motor left A3 Motor right A1 + A2

Becker (standard) Becker test lead required

Somfy RTS motor Somfy io-homecontrol® radio motor

Caution! The BiConnect radio control can only be delivered with Becker motor.

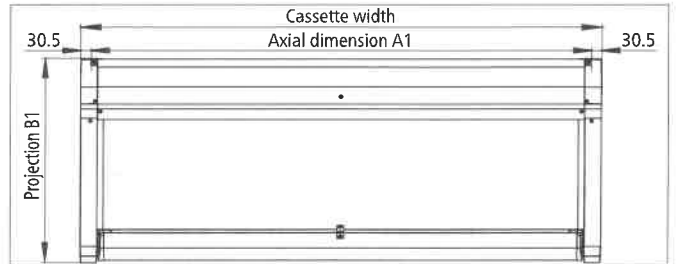

WGM Top distance between centre lines: from centre to centre of side channel + 61 mm = cassette width. Multi-section units: see expl. drawings on p. 2.

Fixing/brackets

	mm	quantity	mm	quantity	mm	quantity	quantity
Fixed support bracket top, complete	80		120		150		220
Adjustable support bracket top, complete			120-165	8	165-210		210-255
Adjustable support bracket top for multi-section units, complete				2			1
Special support bracket*	59-400						height
Cross-shaped support bracket*	80-400						height
Support bracket modern	80		120		150		220
Wall-mount angle bracket for lateral fixing 100 x 50 x 120 mm							Z-shaped bracket 50 x 100 x 120 mm
Long angle bracket 200 x 100 x 5 x 120 mm							U profile for support bracket fins
Base plate for support bracket 5 mm							Base plate for support bracket 10 mm
Support bracket mounting plate for 110 roof support (Terrazza S)							Support bracket mounting plate for 150 roof support (Terrazza L)
Support bracket mounting plate for Terrazza Pure 40 x 100 x 20 mm							
Wall bracket							Rafter assembly
Fixing plate for multi-section unit							Retaining bracket for wind and sun sensor
Wall connection roof, complete							Cable clip
Side cover plate Form A**							Side cover plate Form B**
First installation							

* Caution: Please specify the height when ordering special or cross-shaped support brackets.
** Are supplied in 3,000 mm length and have to be trimmed on site.

BiConnect radio control

BiConnect sensors

BiSens SW 230V BiSens SWR 230V

BiSens SW Solar+

BiConnect radio transmitter

BiEasy 1M BiEasy 5M

BiEasy 15M Go! BiEasy 1MW-3V (wall transmitter, white)

The hand transmitter is available in two colours to choose from

black silver

Somfy hand transmitter

Situo 1 io Pure II Situo 1 RTS Pure II

Situo 5 io Pure II Situo 5 RTS Pure II

Situo 5 Variation A/M Situo 1 Soliris RTS Pure II

io Pure II Situo 5 Soliris RTS Pure II


Somfy controls (separate order form)

The order is placed according to the valid general terms of delivery and payment of weinor.

Signature

Determining dimensions for multi-section units with 2 panels


Calculation of cassette width: (total axial dimension for roof supports/2) + 30 mm. Only applies if both units have the same axial dimensions.

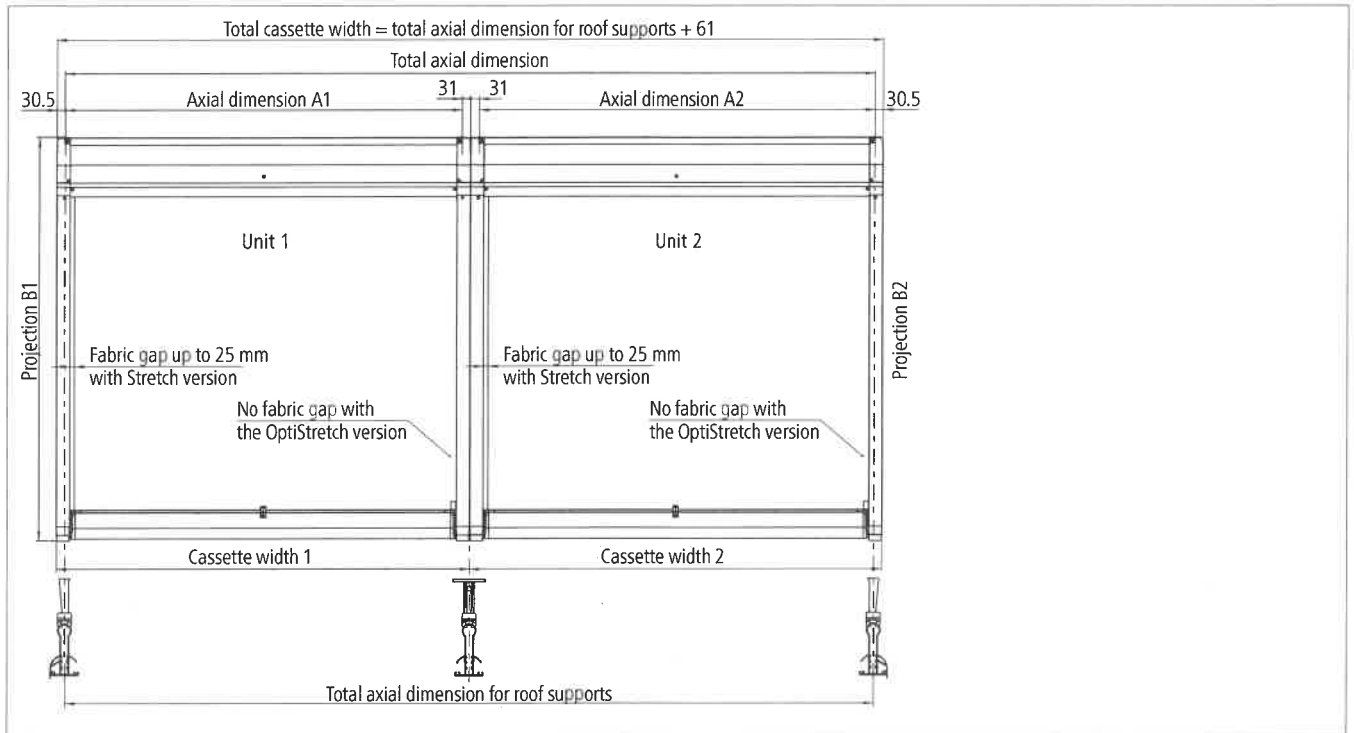

Determining dimensions for multi-section units with 3 panels or more*

Calculation of cassette width 1 + 3 (outside cassettes): (total axial dimension for roof supports/3) + 30 mm

Calculation of cassette width 2 (inside cassettes): (total axial dimension for roof supports/3) - 1 mm

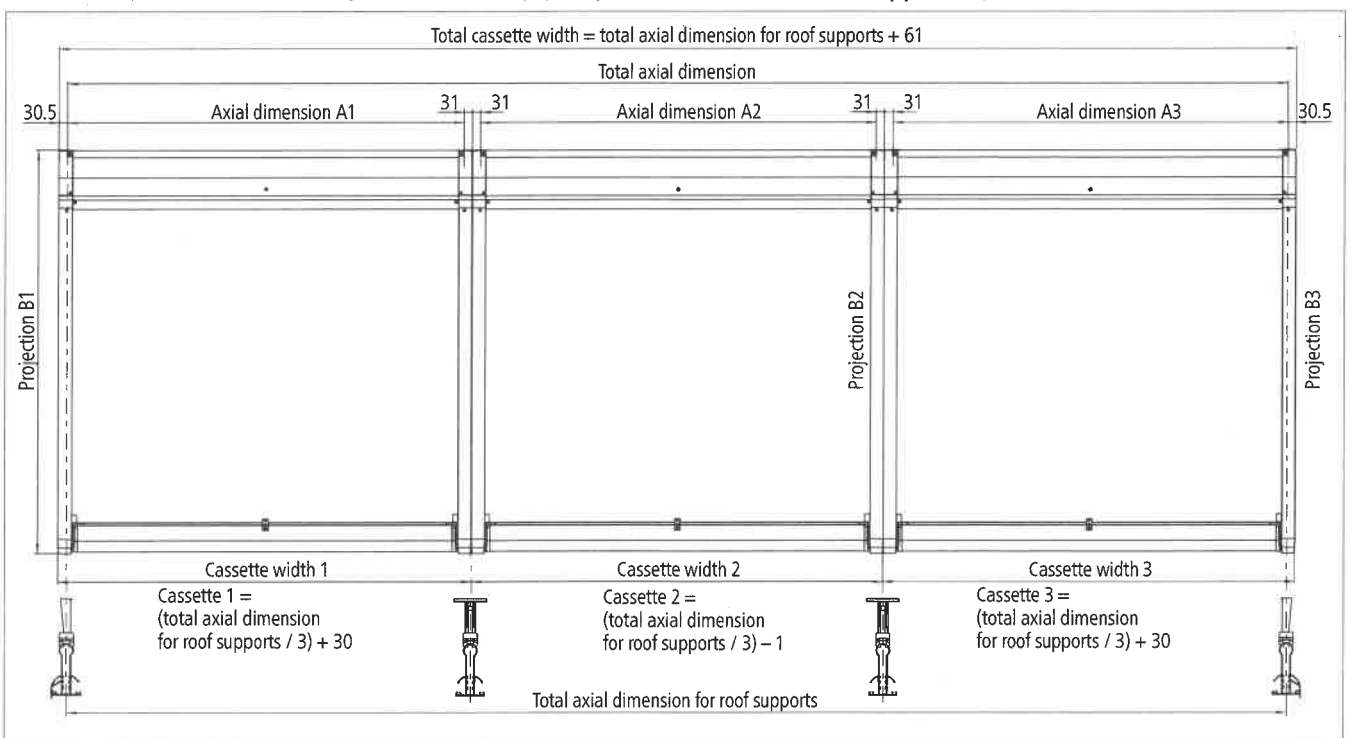

*The determining of measurements applies to a maximum total width of 14 m and only if all axial dimensions are the same and the number of roof panels can be divided by 3.

14° pitch for fair