

SURVEY CHECKLIST: *to be completed on site*****

- 8mm Capping Piece to be fitted at point A, AFTER survey confirm suitability by taking off capping cover and take photo's.
- Point B to be on the house wall, 20mm below the ridge.
- All lower fitting points should be fixed to the middle of the vertical fascia.
- Points Y/Z to be taken from the vent opener screw with the window in the closed position as per inset photo.
- Points E/M to be in-line with glazing bars.
- Points F/G/K/L to be on the chamfer fascia.
- Points D/N to be set at 860mm away from points E/M.
- Points J/H to be set at 380mm away from the centreline of glazing bar.

Confirmation required for the following:

- Colour of Fabric
- Colour of Fittings
- (Please note white & gold fittings carry a surcharge of £5+VAT per sail corner.)

Notes:

Survey points to be taken from point on conservatory where eye plates are to be fixed.

MARK ALL POINTS BEFORE COMMENCING SURVEY

Dimensions should be taken as accurately as possible ideally +/-5mm

Design Shows:
4 x Made to Measure InShade Sails - ISX - TBC
(Sails are shown in Ivory for design clarity)

Obstructions: Openers & Light

Special Fittings: M8 CPF

Structure: UPVC

t : 01786 450083 e : inshade@shadeplus.co.uk


Project: 72292-10370-Lakeman

Date: 17.04.25 Drawn: RD Check: AB

Required Dims :

Sail 01	Sail 02	Sail 03	Sail 04
AB 1415	AE 2045	AJ 1930	AN 2080
BC 2035	EF 1025	JK 1170	NP 1890
CD 1890	FG 1585	KL 1585	PB 2040
DA 2070	GH 1170	LM 1025	AP 2445
BD 2800	HA 1935	MA 2050	BN 2805
AC 2440	AF 2115	AK 2045	BZ 1110
AY 1300	AG 2055	AL 2120	PZ 1175
BY 1105	EG 2430	JM 2150	NZ 1755
CY 1170	EH 3150	KN 2425	JL 2555
DY 1770	FH 2560		

Custom Sail Survey - Option 01

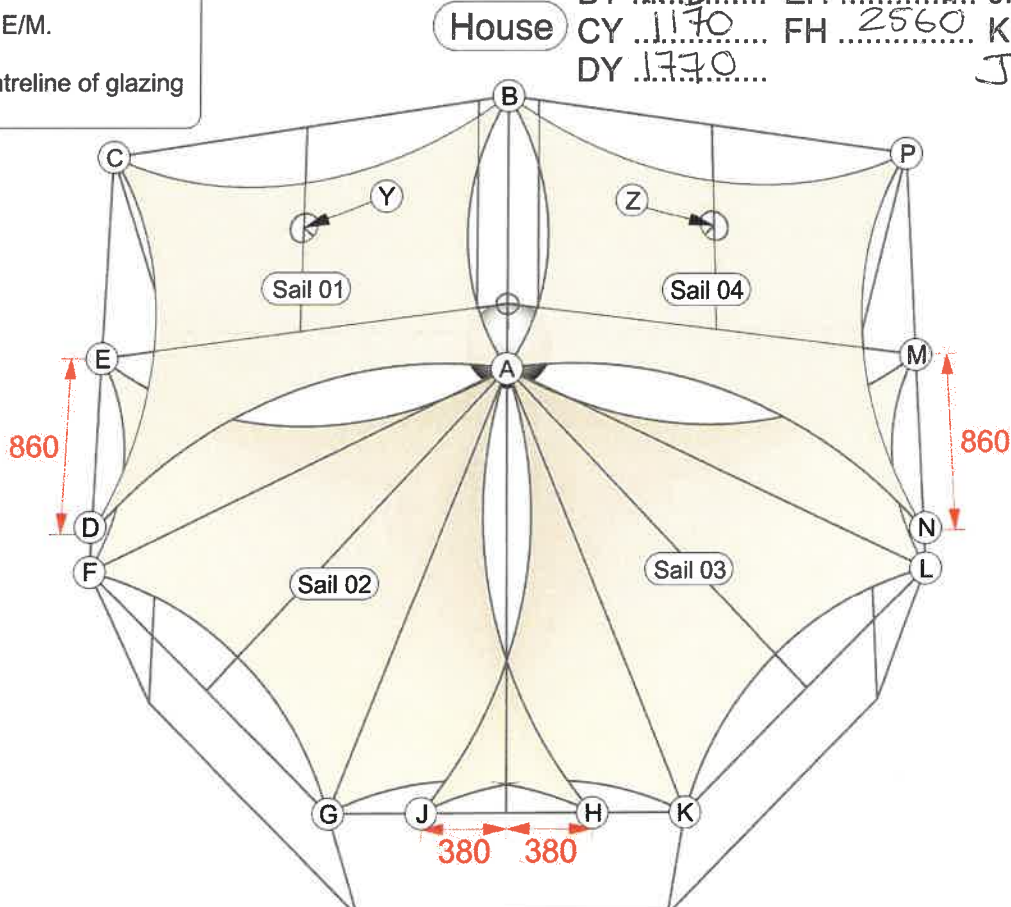

Handwritten notes and signatures on the right margin.