



ALUROLL

ORDER CONFIRMATION : 175607

YOUR REF : SLOUS SO17478

DATE : 16/02/2026

CONFIRMED DELIVERY DATE : 25/02/2026

BILLING ADDRESS

CP Interiors
Rue Des Pres Trading Estate
St Saviour,
Jersey,
JE2 7QN

DELIVERY ADDRESS

CP Interiors
DSV BARNES WALLIS ROAD
SEGENSWORTH EAST IND
EST
10 BRUNEL WAY
FAREHAM
PO15 5TX


Dear Rachel,

Thank you for your recent order. I am pleased to enclose your order confirmation, prepared based on the information you provided. Please review the details carefully, as the order will shortly be released to production.

Yours Faithfully,
Tom Jones

#	PRODUCT	PRICE	QTY	TOTAL
1	E37 (our reference 189887) Overall Width : 2800mm Overall Height : 1730mm Curtain Colour : RAL9016 White Surround (Full Box) : RAL9016 White Fix Type : Internal Face Type of Operation : Electric Motor Type : Somfy Motor Side : Right Override Type : Internal High Level Control Panel Type : No Panel Guide Type : 53mm Autolocks Somfy RTS Motor Upgrade Situ 1 RTS 2 x 25 x 50 Box Section @1730 1 x 20 x 40 Angle @ 2800	£1,198.35	1	£1,198.35
2	Parts Only (our ref 191512) UNEQUAL ANGLE WHITE 20 X 40 6M 2.800 M x 1	£16.78	1	£16.78

DELIVERY	£0.00
SUB TOTAL	£1,215.13
VAT	£243.03
TOTAL	£1,458.16

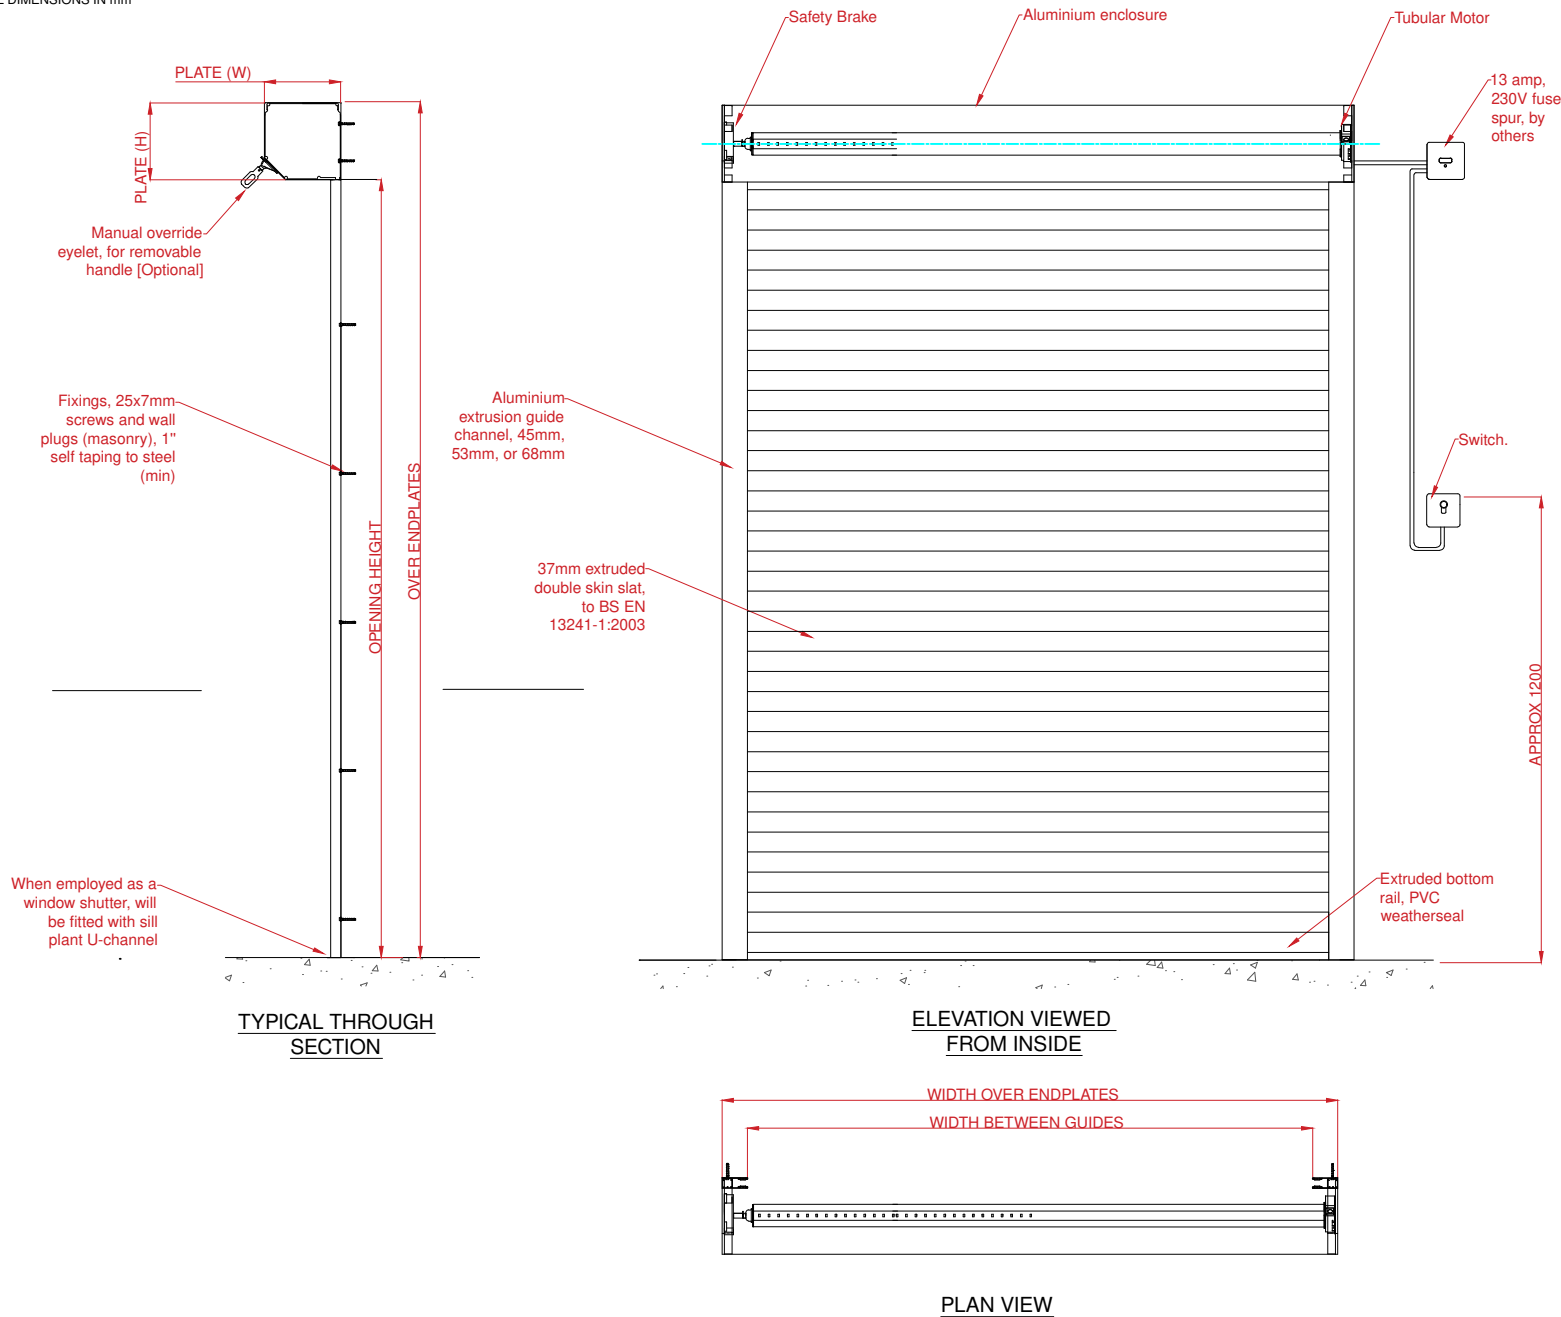

NOTES

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE THAT THE STRUCTURE IS CAPABLE OF ACCEPTING THE FIXINGS SHOWN AND SUPPORTING THE DOOR WEIGHT WHILST AT REST AND DURING OPERATION. STRUCTURAL SUPPORTS, E.G., STEEL OR TIMBER MUST BE SECURED AT HEAD AND FOOT. SEE WEIGHTS BELOW.

APPROX. CURTAIN WEIGHT (KG): 32.52
 APPROX. BARREL WEIGHT (KG): 7.24
 APPROX TOTAL DOOR WEIGHT (KG): 43

FULL ACCESS TO THE SHUTTER BOX MUST BE PROVIDED ACROSS THE OPENING, FOR MAINTENANCE / REPLACEMENT PURPOSES. IF FULL ACCESS IS NOT PROVIDED, THE INSTALLER WILL NOT ACCEPT ANY CHARGES ASSOCIATED WITH THE GAINING OF ACCESS TO FACILITATE THE MAINTENANCE OR REPLACEMENT OF ANY SHUTTER COMPONENTS.

ELECTRICAL OPERATION BY 230V MOTOR. CLIENT TO PROVIDE A 230V, SINGLE PHASE, 50HZ SUPPLY TERMINATING WITHIN ONE METER OF THE MOTOR

WHEN MOUNTING ABOVE CEILING ALLOW 25MM CEILING TO ENDPLATE CLEARANCE.

NOTE: ACTUAL OPENING HEIGHT DEDUCT 50mm FROM OPENING HEIGHT TO ALLOW FOR BOTTOM SLAT LEAD INTO GUIDE TO CALCULATE ACTUAL OPENING / DAYLIGHT OPENING HEIGHT

WINDOW / DOOR SHUTTER WINDOW SHUTTERS (NOT SHOWN) SHOULD BE DESIGNED WITH A SILL PLANT UNDERNEATH THE GUIDE CHANNELS, INTO WHICH THE SHUTTER BOTTOM SLAT WILL DESCEND, PROVIDING ANTI-LIFT SECURITY.

WHERE WINDOW / DOOR HANDLES OR OTHER PROTRUDING ITEMS WILL AFFECT THE MOVEMENT OF THE SHUTTER, 25 OR 50MM ALUMINIUM PACKING IS RECOMMENDED.

SPECIAL INSTRUCTIONS

VISION SLAT:	N
VELCRO:	N
BOX STIFFENERS:	N
BACK BOX:	
LID:	
OVERRIDE:	Internal High
GUIDE CHANNEL WIDTH	53mm
WIDTH BETWEEN GUIDES	2694
WIDTH OVER GUIDES	2800
HEIGHT OVER END PLATES	1730
OPENING HEIGHT	1550
END PLATE HEIGHT	180
END PLATE WIDTH	180
MOTOR HAND	Right
CURTAIN FINISH	RAL9016
SURROUND FINISH	RAL9016

271.20260216



Drawing Title: E37 Face Fit - Electric Operation - Tubular	Client: CP Interiors	Date: 16/02/2026	Rev: 1
	Project No: 175607-189887	By: TJ	Date Revision: 04/05/24 APPROVED BY JM